



Regal[®] Series – Oil Temperature Control Units

The Regal Series hot oil temperature control units are designed to control the temperature of your process by circulating a high temperature heat transfer fluid through the process.

A high flow pump circulates the fluid at the appropriate temperature to maintain a precise fluid and process temperature. Depending on whether the process needs to be heated or cooled the circulated fluid is either heated by the electric heater or cooled indirectly via the available water to oil heat exchanger.

The Regal Series can be used in a wide range of industrial processes including; plastics, rubber, die casting as well as many other manufacturing processes that require a process fluid temperature range between 100°F - 500°F.


These units are designed with the highest quality components and can be customized to meet your specific requirements.



- 100° to 500°F Process Temperatures
- 1 to 7.5 Horsepower Centrifugal Pumps
(20 - 100 gallons per minute flow rates)
- 12 to 48 kW Heaters
- 3.6 Square Foot Heat Exchanger
(Included on "HC" models)
- Choice of Microprocessor Control Instruments

Southgate
Process Equipment, Inc.

Authorized Representative:
Southgate Process Equipment, Inc.
87 Hickory Springs Industrial Drive
Canton, GA 30115
Ph: (770) 345-0010
Email: sales@southgatepe.com
Website: www.southgatepe.com

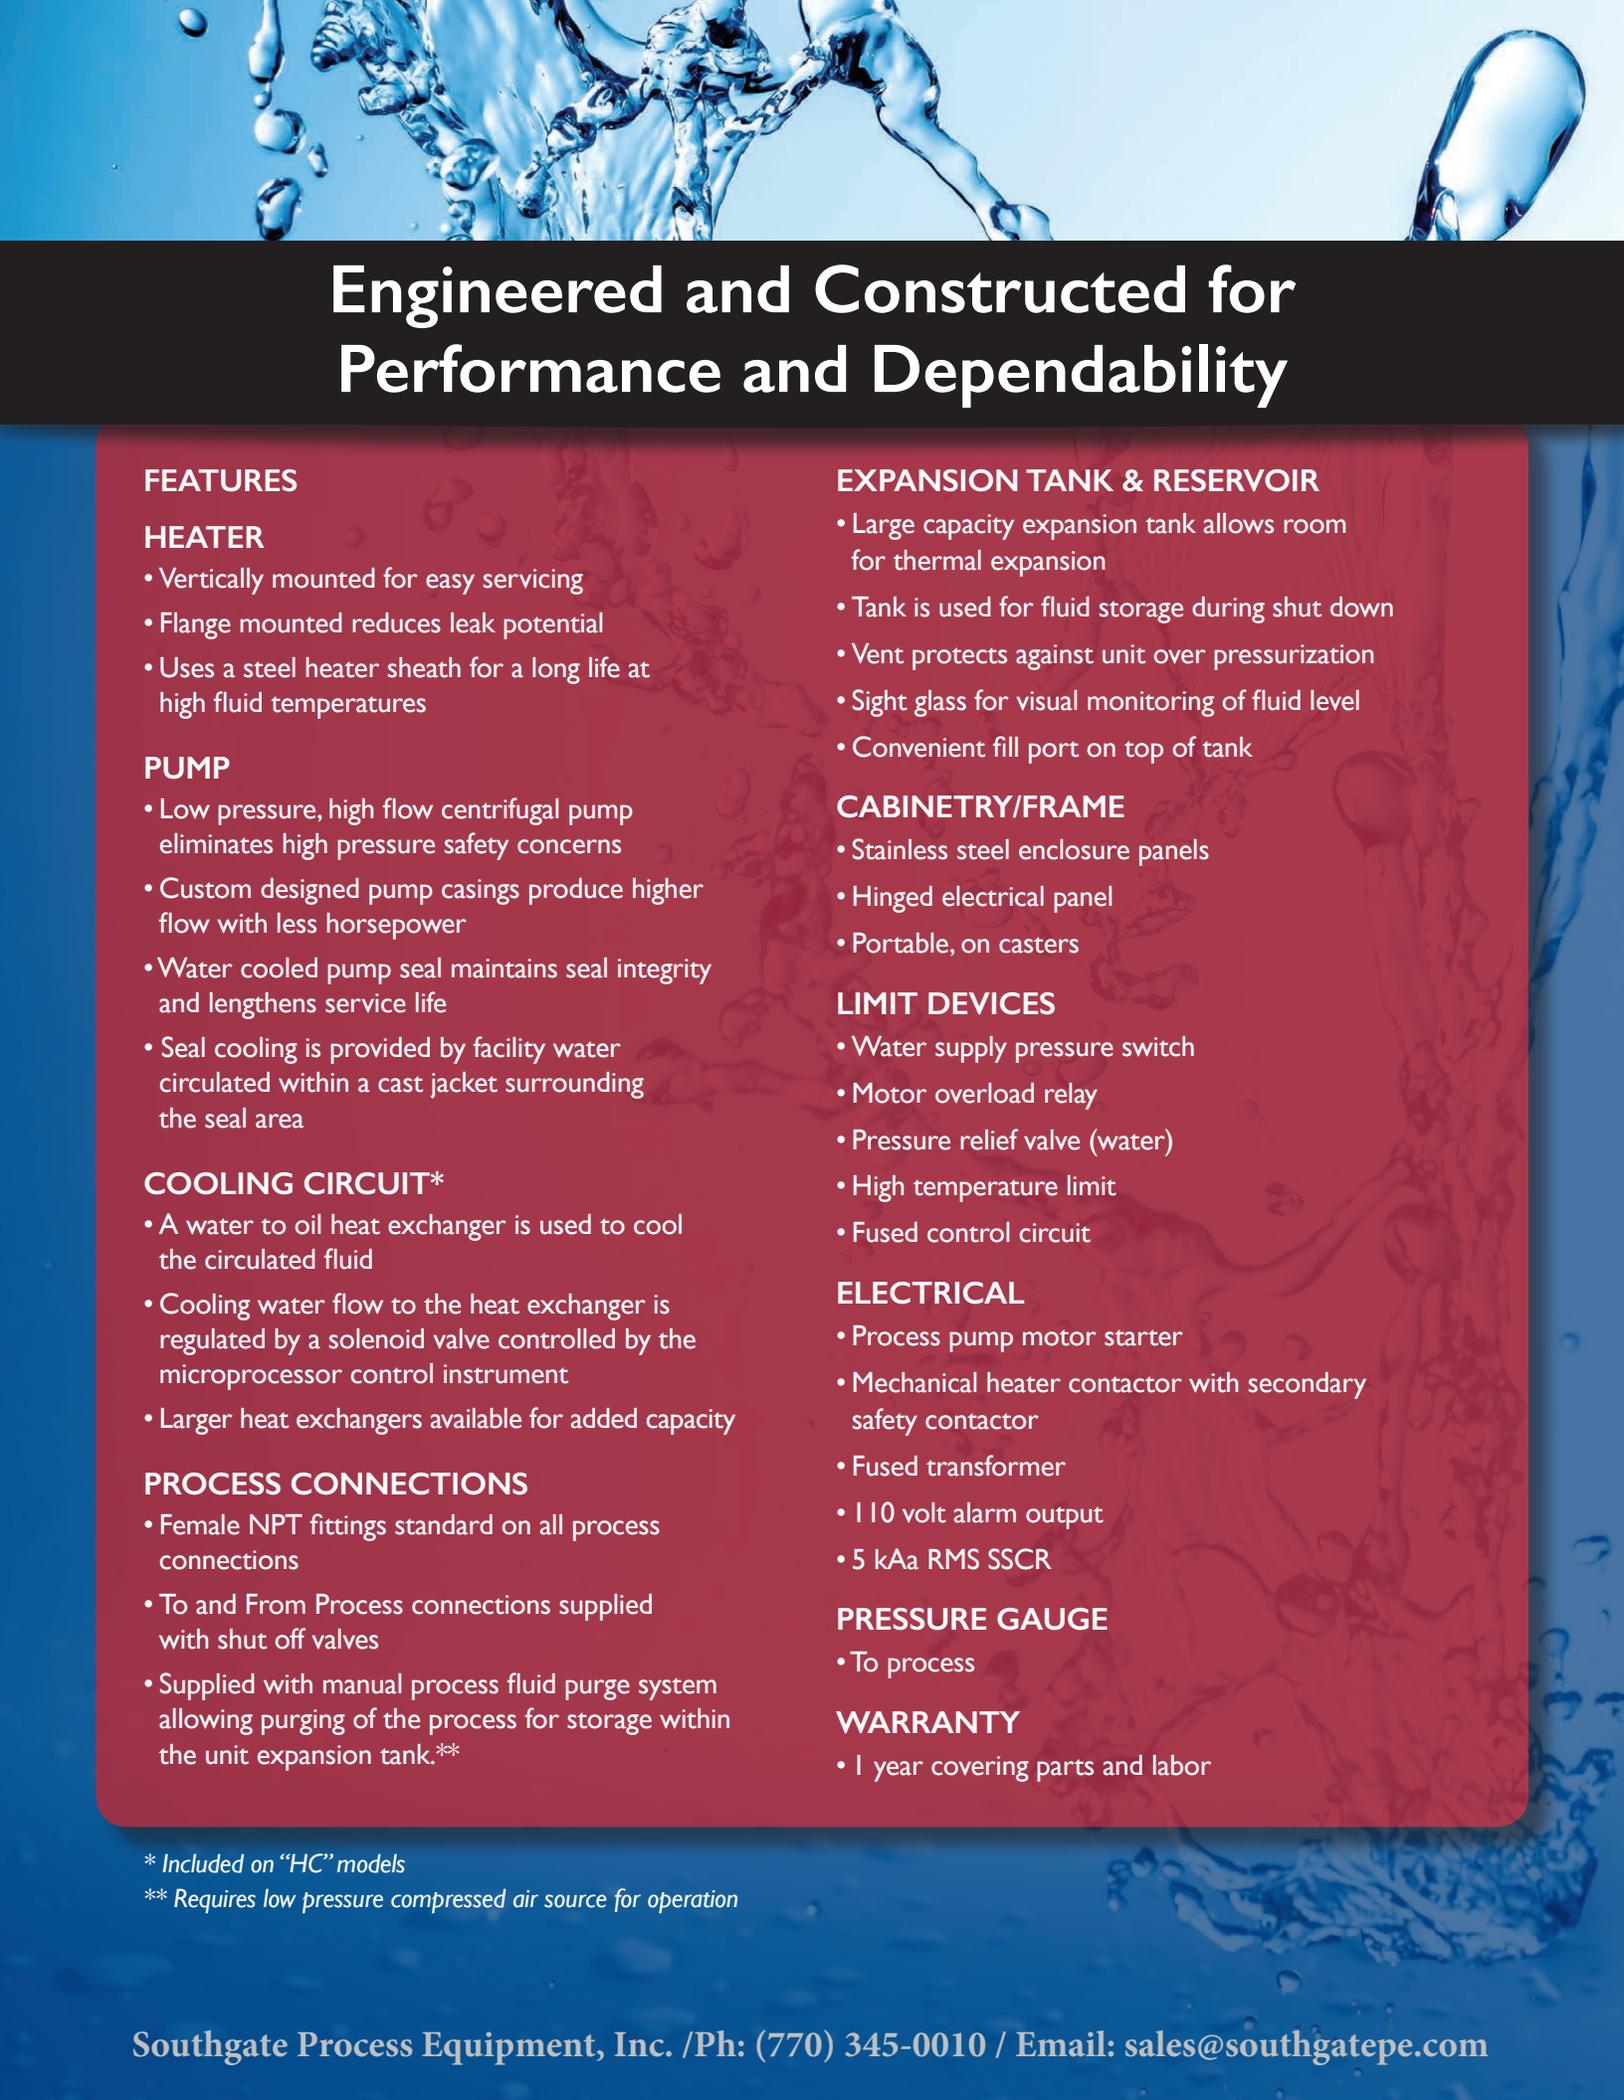

Engineered and Constructed for Performance and Dependability

FEATURES

HEATER

- Vertically mounted for easy servicing
- Flange mounted reduces leak potential
- Uses a steel heater sheath for a long life at high fluid temperatures

PUMP

- Low pressure, high flow centrifugal pump eliminates high pressure safety concerns
- Custom designed pump casings produce higher flow with less horsepower
- Water cooled pump seal maintains seal integrity and lengthens service life
- Seal cooling is provided by facility water circulated within a cast jacket surrounding the seal area

COOLING CIRCUIT*

- A water to oil heat exchanger is used to cool the circulated fluid
- Cooling water flow to the heat exchanger is regulated by a solenoid valve controlled by the microprocessor control instrument
- Larger heat exchangers available for added capacity

PROCESS CONNECTIONS

- Female NPT fittings standard on all process connections
- To and From Process connections supplied with shut off valves
- Supplied with manual process fluid purge system allowing purging of the process for storage within the unit expansion tank.**

EXPANSION TANK & RESERVOIR

- Large capacity expansion tank allows room for thermal expansion
- Tank is used for fluid storage during shut down
- Vent protects against unit over pressurization
- Sight glass for visual monitoring of fluid level
- Convenient fill port on top of tank

CABINETY/FRAME

- Stainless steel enclosure panels
- Hinged electrical panel
- Portable, on casters

LIMIT DEVICES

- Water supply pressure switch
- Motor overload relay
- Pressure relief valve (water)
- High temperature limit
- Fused control circuit

ELECTRICAL

- Process pump motor starter
- Mechanical heater contactor with secondary safety contactor
- Fused transformer
- 110 volt alarm output
- 5 kAa RMS SSCR

PRESSURE GAUGE

- To process

WARRANTY

- 1 year covering parts and labor

* Included on "HC" models

** Requires low pressure compressed air source for operation

OPTIONS

CONTROL INSTRUMENT

- SPI/Modbus communications cable
- Modbus TCP/IP communication interface

SYSTEM ALARMS

- Audible alarm
- Visual/audible alarm beacon

HEAT EXCHANGERS

- Custom heat exchanger sizes



Control Instruments

Advantage microprocessor control instruments are developed specifically for high temperature fluid circulating temperature control units. Each control instrument is built for the industrial environment and includes a 4 year warranty.

Temptender® T500 Series



- 4.3" full color touch screen simplicity interface
- More than 25 screens with custom set-up and system monitoring information
- Home screen has continuous set point and to process temperature
- % Heating or Cooling indication on home screen
- Out-of-spec alarm including standard audible signal
- Pump rotation monitor
- Selectable English or Spanish language display
- °F or °C temperature display
- SPI or Modbus RTU communication
- For process fluid temperature up to 500°F
- Optional Modbus TCP/IP communication

G500 Series



- Easy to use menu driven controller with LCD display
- Home screen includes continuous set point and to process temperature
- % Heating or Cooling indication on home screen
- Out-of-spec alarm including standard audible signal
- °F or °C temperature display
- SPI or Modbus RTU communication
- For process fluid temperature up to 500°F
- Optional Modbus TCP/IP communication

	Model ⁶	I230H	I230HC	I245H	I245HC	I250H	I250HC	I645H	I645HC	I650H	I650HC	I660H	I660HC	2460H	2460HC
Heater¹	KW	12	12	12	12	12	12	16	16	16	16	16	16	24	24
Heat Exchanger	Square Feet	—	3.6	—	3.6	—	3.6	—	3.6	—	3.6	—	3.6	—	3.6
Process Pump	HP	1	1	1½	1½	2	2	1½	1½	2	2	3	3	3	3
	GPM	30	30	45	45	50	50	45	45	50	50	60	60	60	60
	PSI	24	24	26	26	28	28	26	26	28	28	26	26	26	26
Fluid Volume^{6,7} (approx. gallons)	Unit	3	3	3	3	3	3	5	5	5	5	5	5	5	5
	Expansion Tank	2	2	2	2	2	2	4	4	4	4	4	4	4	4
Unit Amperage² (full load) @ 3ø/60hz	230 volts	34.8	34.8	36.4	36.4	38.0	38.0	47.0	47.0	49.0	49.0	51.0	51.0	71.0	71.0
	460 volts	17.9	17.9	18.7	18.7	19.5	19.5	23.5	23.5	24.5	24.5	25.5	25.5	35.5	35.5
	575 volts	14.3	14.3	14.9	14.9	15.6	15.6	18.8	18.8	18.5	18.5	20.4	20.4	28.4	28.4
Unit Dimensions	Height	44	44	44	44	44	44	58	58	58	58	58	58	58	58
	Width	16	16	16	16	16	16	23	23	23	23	23	23	23	23
	Depth	24	24	24	24	24	24	47	47	47	47	47	47	47	47
Process Connections	To/From ³	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Supply/Drain ⁴	½	½	½	½	½	½	½	½	½	½	½	½	½	½
Unit Weight (pounds)	Shipping ⁵	315	330	320	335	325	340	585	600	590	605	595	610	600	615

	Model ⁶	2770H	2770HC	27100H	27100HC	3660H	3660HC	3670H	3670HC	36100H	36100HC	4870H	4870HC	48100H	48100HC
Heater¹	KW	27	27	27	27	36	36	36	36	36	36	48	48	48	48
Heat Exchanger	Square Feet	—	3.6	—	3.6	—	3.6	—	3.6	—	3.6	—	3.6	—	3.6
Process Pump	HP	5	5	7½	7½	3	3	5	5	7½	7½	5	5	7½	7½
	GPM	70	70	100	100	60	60	70	70	100	100	70	70	100	100
	PSI	28	28	44	44	26	26	28	28	44	44	28	28	44	44
Fluid Volume^{6,7} (approx. gallons)	Unit	5	5	5	5	8	8	8	8	8	8	8	8	8	8
	Expansion Tank	5	5	5	5	7	7	7	7	7	7	7	7	7	7
Unit Amperage² (full load) @ 3ø/60hz	230 volts	84.0	84.0	90.8	90.8	101.1	101.1	106.7	106.7	113.5	113.5	138.8	138.8	143.6	143.6
	460 volts	42.4	42.4	45.8	45.8	50.9	50.9	53.7	53.7	57.1	57.1	68.9	68.9	72.3	72.3
	575 volts	33.9	33.9	36.6	36.6	40.7	40.7	42.9	42.9	45.6	45.6	55.1	55.1	57.8	57.8
Unit Dimensions (inches)	Height	65	65	65	65	65	65	65	65	65	65	65	65	65	65
	Width	22	22	22	22	22	22	22	22	22	22	22	22	22	22
	Depth	33	33	33	33	33	33	33	33	33	33	33	33	33	33
Process Connections (inches)	To/From ³	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	Supply/Drain ⁴	½	½	½	½	½	½	½	½	½	½	½	½	½	½
Unit Weight (pounds)	Shipping ⁵	720	735	730	745	730	745	750	770	760	780	780	800	800	820

1. Derate heater output by 25% for 208/3/60 operation. 2. Consult factory for 50hz operations. 3. To Process/From Process, Female NPT fittings. 4. Cooling water supply/drain for pump seal and optional heat exchanger cooling, Female NPT fittings. 5. Approximate shipping weight. Selection of certain options and custom features may change the shipping weight. 6. Typical fluid expansion rates: a. Paratherm OR : 4.00% per 100°F b. Paratherm NF : 3.04% per 100°F c. Multitherm PG-1 : 3.10% per 100°F d. Calflo FG : 5.62% per 100°F
7. Do not use Mobiltherm 603. 8. Models with an "H" suffix provide heating only. Models with an "HC" suffix provide cooling through the U-Tube heat exchanger and heating. Cooling water must be provided from an external source.

Model Designator for Regal Series Oil Temperature Control Units

RK — I230 H T500

Regal Series

Heater kW

Nominal Flow Rate GPM

Control Instrument

T500
G500

H : Heating Only
HC : Heating & Cooling



Proudly Made In The USA since 1977

Since product innovation and improvement is our constant goal, all features and specifications are subject to change without notice or liability.

Southgate Process Equipment, Inc. Ph: (770) 345-0010 / Email: sales@southgatepe.com